

# APEXA® EL-1500


## Elkhart Lake Compact POS

APEXA® EL-1500 is a premium all-in-one POS terminal equipped with Elkhart Lake,

Intel® Celeron® series processor with high-resolution graphics.

The compact monitor screen allows users to make practical use of limited space.

It can create a sophisticated interior design in a modern and contemporary style, and is optimized for large-scale distribution, dining, specialty stores, and franchise industries.

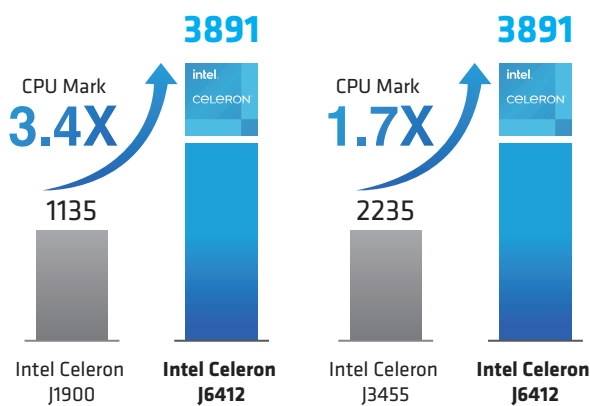

### APEXA® EL-1500\_Features & Benefits



#### The next-generation Intel® Celeron® Elkhart Lake

- Higher-performance computing and graphics
- POS systems for retail and QSR



#### Bright and clear touch screen

- 15" TFT LCD, LED backlight
- PCAP touch with precise touch



#### Stand or wall mount installation

- stand or wall mount installation
- VESA mount compatible



#### Fast installation and maintenance

- Spacious I/O ports placed on top for easy access
- Reduced maintenance costs



#### Liquid ingress protection design

- Prevents the ingress of various liquids and foreign substances
- More suitable for food and beverage service environments



#### Support for various options

- Second display (9.7", 12.1", 15" option)
- Customer display, MSR, fingerprint reader, etc.

# APEXA® EL-1500 Specifications

System	Processors	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz
	Chipset	Intel® Elkhart Lake
	Memory	4GB Standard, DDR4 3200 MT/s, Socket 1 x SODIMM (Max. 32GB)
	Storage	SATA 3 (6Gb/s) 2.5 inch SSD 64GB, Support AHCI
	Operating Systems	Windows 10 IoT Enterprise
	Audio	HD Audio Codec
Display	Type	15" TFT LCD, LED Backlight
	Resolution	1024 x 768
	Brightness	300 cd/m <sup>2</sup> (typ.)
	Touchscreen	Projected Capacitive Touch
Interface	Display	VGA x1 (With Power Output)
	USB	6 (Rear 2, Back 4, USB 3.0 x 2, USB 2.0 x 2) 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45
	Serial	6 (COM1 with 5V/12V Power Output on 9 Pins, BIOS) (COM2~3 RJ-45, Full Signal) (COM4 RJ-11, Only TX/RX, 12V Power Output, Reserved for CDP) (COM5, Full Signal) (COM6 RJ-45, Only TX/RX, 5V Power Output, Reserved for MSR)
	Back I/O	Cash Drawer Port(GPIO Communication) (RJ-11 6 Pins) x 1 + USB 2.0 x 2 (Default)
	Optimal I/O	Gigabit Ethernet x1 (RJ-45) + USB 2.0 x 2 (Factory option) 12V Powered USB 2.0 x 1 + 24V Powered USB 2.0 x 1 (Factory option) 12V Powered USB 2.0 x 1 + 12V Powered USB 2.0 x 1 (Factory option) 24V Powered USB 2.0 x 1 + 24V Powered USB 2.0 x 1 (Factory option) 12V Powered USB 2.0 x 1 + USB 2.0 x 1 (Factory option) 24V Powered USB 2.0 x 1 + USB 2.0 x 1 (Factory option) COM5 x 1 (RJ-45, Full signal) + USB 2.0 x 2 (Factory option) USB A 2.0 x 4 (Factory option) One option attachable at a time
	LAN	Gigabit Ethernet x1 (RJ-45)
	Audio	Line-out x1
	Power DC-IN	3 Pin DIN Jack
	Extension Slot	M.2 for WiFi/BT, SSD
	Power Supply	Adapter 24V, 2.5A (Nomarl) / 24V, 6.35A(Powered USB Option)
Physical & Environmental	Operating Temperature	0°C ~ 60°C at 10% to 90% Humidity
	Storage Temperature	-20°C ~ 80°C at 10% to 90% Humidity
	Dimensions (W x H x D)	364 x 333 x 210 (mm), 14.3 x 13.1 x 8.2(in)
	Packing Dimensions (W x H x D)	500 x 470 x 300 (mm), 19.6 x 18.5 x 11.8(in)
	Net Weight	5,300g, 11.68 lbs
	Packing Weight	8,000g, 17.63 lbs
	Color	Dark Grey, High Gloss White
Options & Peripherals	2nd Displays	9.7", 12.1", 15" LCD Display, 1024 x 768, Optional Touchscreen
	Customer Display	VFD, 20 Columns x 2 Lines
	Storage	2.5 inch SSD 128GB, HDD 500GB, 1TB
	Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track
	Smart Card Reader	EMV Level 1
	Dallas	Dallas i-button Reader
	Fingerprint	Yes
	Wall Mount Kit	VESA-Compatible, 75 x 75(mm), 100 x 100(mm)
	Serial Conversion Cable	RJ-45 to D-sub 9
	Speaker	2 x 1W (Stereo) (Factory Option)
	WiFi/BT	M.2 for WiFi/BT
	TPM	Support